

How to add devices into GuardingVision account

Users can enable GuardingVision function via GuardingVision APP; <https://www.GuardingVision.com> web portal; Mobile app or CMS client.


Note:

For Mobile app & CMS Client, we suggest waiting for new available version released soon.

Method 1: Add devices via GuardingVision APP


Steps:

(1) Run GuardingVision app at your mobile;

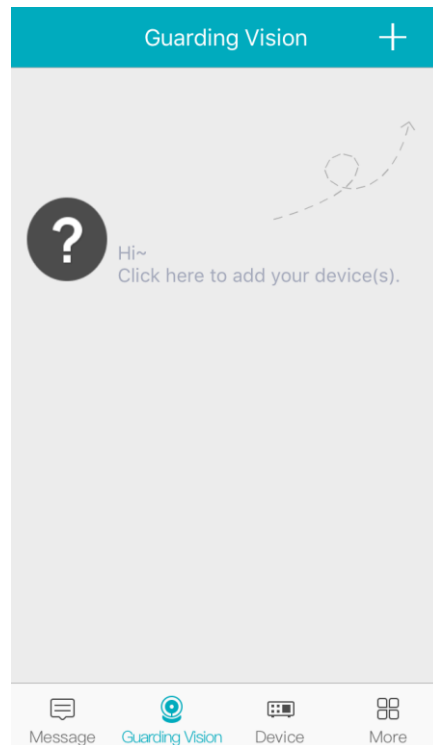


(2) Add the device by scanning device QR code or inputting device serial number manually;

Title:	How to add device into GuardingVision account	Version:	v1.0	Date:	1/3/2017
Product:	Cameras, NVRs, DVRs	Page:	3 of 14		

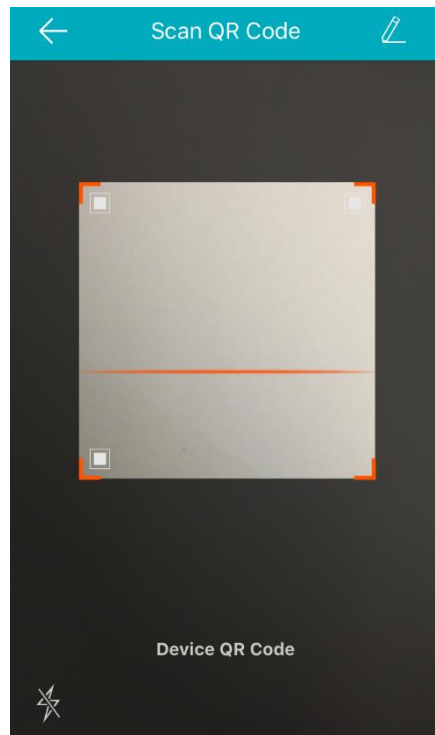


(3) Click '**Add**' to continue;

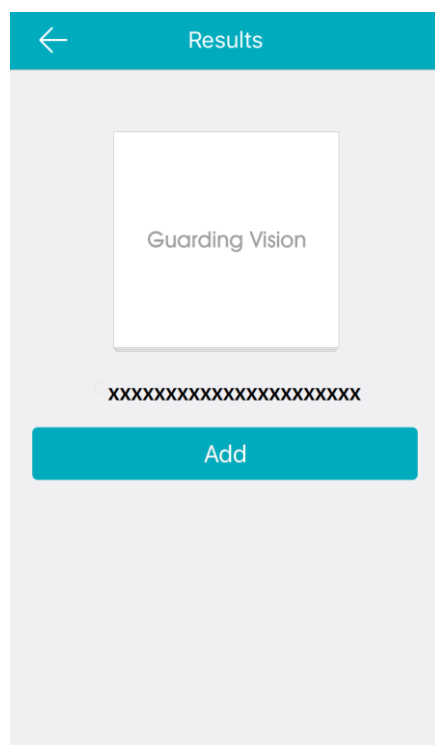


(4) Finish adding.

Title:	How to add device into GuardingVision account	Version:	v1.0	Date:	1/3/2017
Product:	Cameras, NVRs, DVRs	Page:	4 of 14		

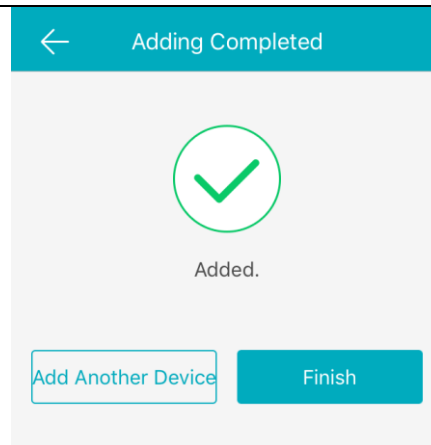

(5) Go back to **GuardingVision** tab to live view.

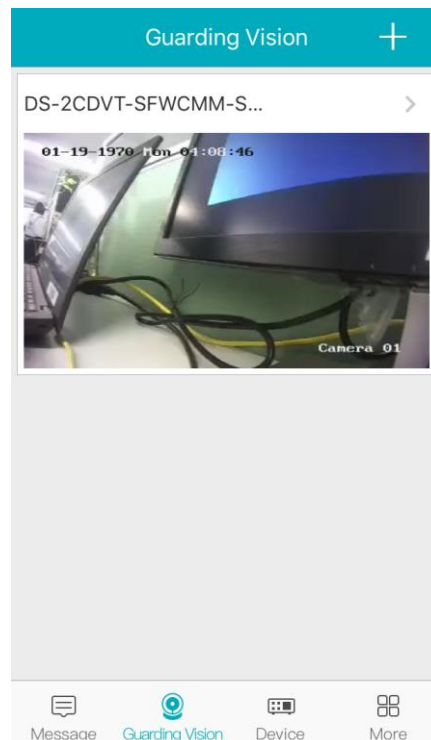

Note:

How to find device verification code?

- a) Try to find device verification code on the label of the device;




- a) Try to find the device verification code on the local GUI of DVRs/NVRs.

Title:	How to add device into GuardingVision account	Version:	v1.0	Date:	1/3/2017
Product:	Cameras, NVRs, DVRs	Page:	5 of 14		



c) Try to find the verification code in the device web configuration interface for both camera and DVRs/NVRs.

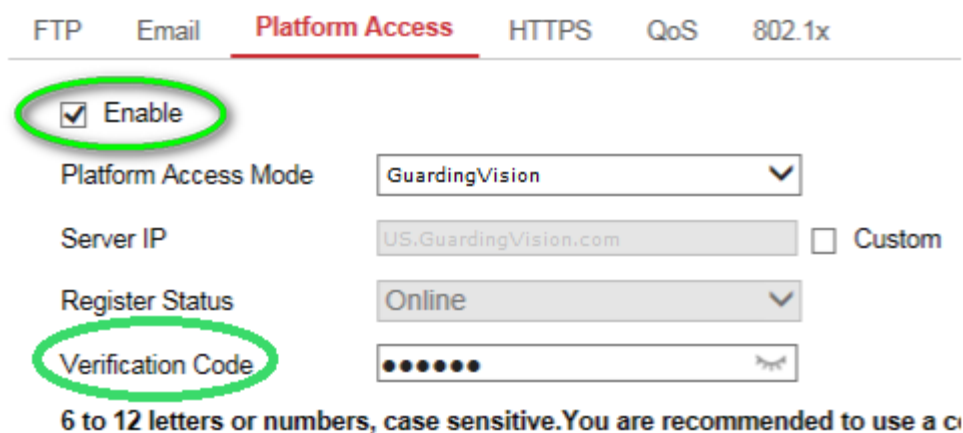

Note:

If the user wants to use GuardingVision domain name service at GuardingVision App, he needs to continue to add this device in **Device** tab with GuardingVision Domain adding type.

Steps:


- (1) Go to **Device** tab; click the '+' at the upper-right of the interface;

Viewing Cameras from Windows PC using GUARDING VISION

(1) Type www.GuardingVision.com into browser location bar;




(2) Login with your account user name and password.

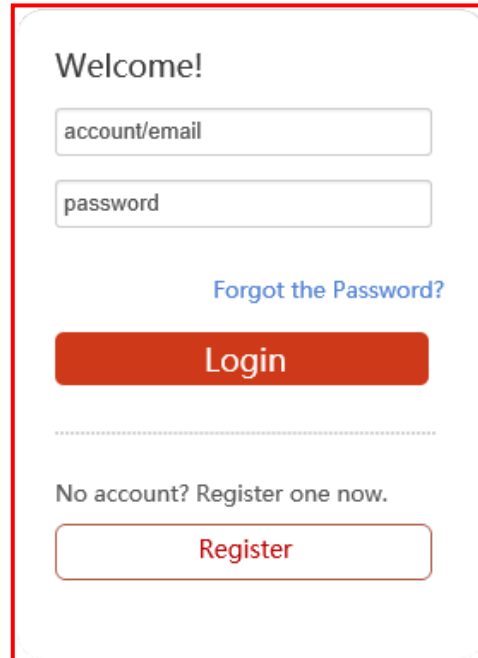


(3) Go to **Device Management** and click **Add** to add a device.



(3) Click **Add**; Input your device **Serial no.** then click **Search**.

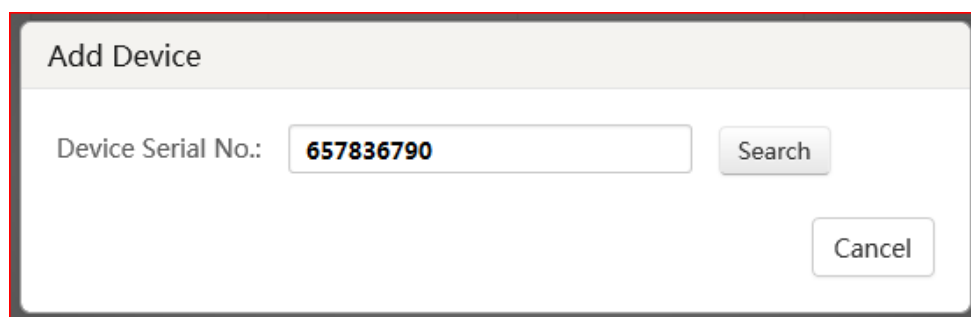


(4) When a connection is made to the device (it must be powered on and connected to the Internet) a pop-up shows the model and confirms the S/N. If this is the desired device, Click '+' to continue;

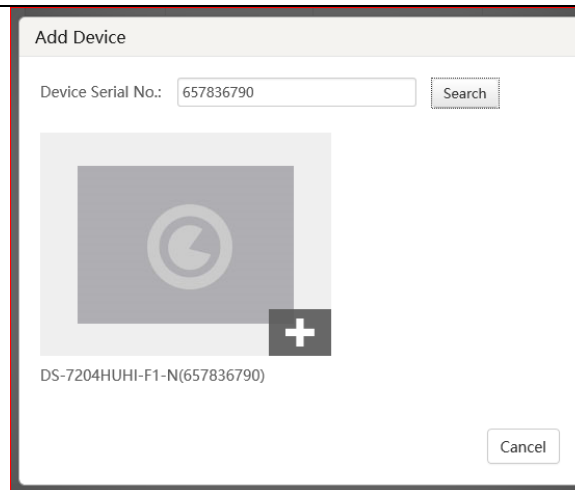


The 'Add Device' pop-up window contains a 'Device Serial No.' field with the value '657836790' and a 'Search' button. Below this is a placeholder image for a device with a plus sign in the bottom right corner. Under the image, the text 'DS-7204HUHI-F1-N(657836790)' is displayed. A 'Cancel' button is located at the bottom right of the window.

(5) Input your device **verification code**, then click **Add** to finish.

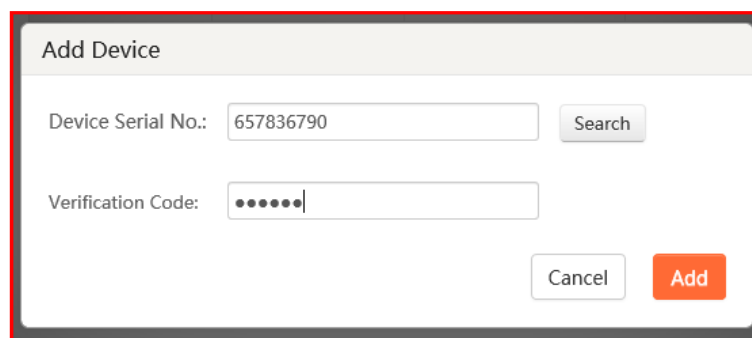

The 'Add Device' pop-up window now includes a 'Verification Code' field with six dots and a cursor. It also features 'Cancel' and 'Add' buttons at the bottom right.

(6) A pop-up confirms success. And the device now appears on the **Device Management** page.

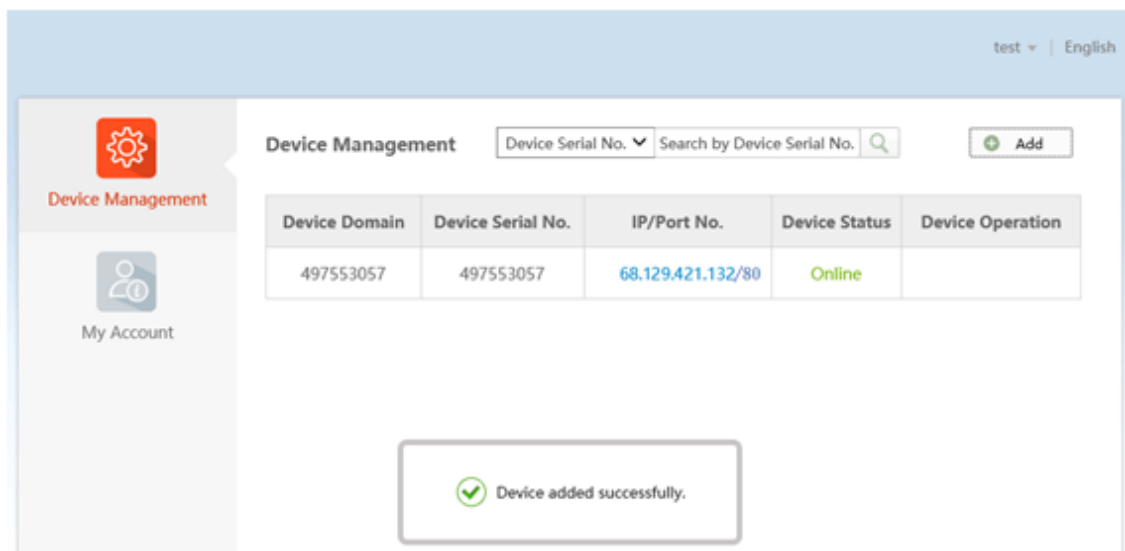


The 'Device Management' page features a sidebar with 'Device Management' (gear icon) and 'My Account' (person icon). The main content area has a 'Device Management' header with a search bar and an 'Add' button. Below is a table with the following data:





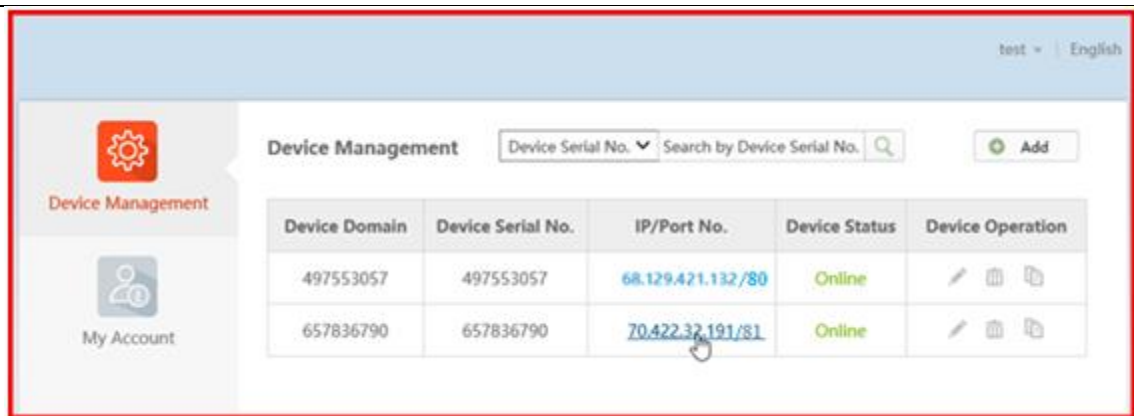

Device Domain	Device Serial No.	IP/Port No.	Device Status	Device Operation
497553057	497553057	68.129.421.132/80	Online	


A success message box at the bottom center states: 'Device added successfully.'

(7) Double click on the **IP address** and **Port No.** of a connected device, a new windows opens showing the login screen for the device. Enter the **user name** and **password** to login into the device.



The screenshot shows a web interface for 'Device Management'. On the left is a sidebar with 'Device Management' (gear icon) and 'My Account' (user icon). The main area has a search bar and a table of devices. The table has columns: Device Domain, Device Serial No., IP/Port No., Device Status, and Device Operation. Two devices are listed, both with status 'Online'. The second device's IP/Port No. '70.422.32.191/81' is highlighted by a mouse cursor.

Device Domain	Device Serial No.	IP/Port No.	Device Status	Device Operation
497553057	497553057	68.129.421.132/80	Online	  
657836790	657836790	70.422.32.191/81	Online	  

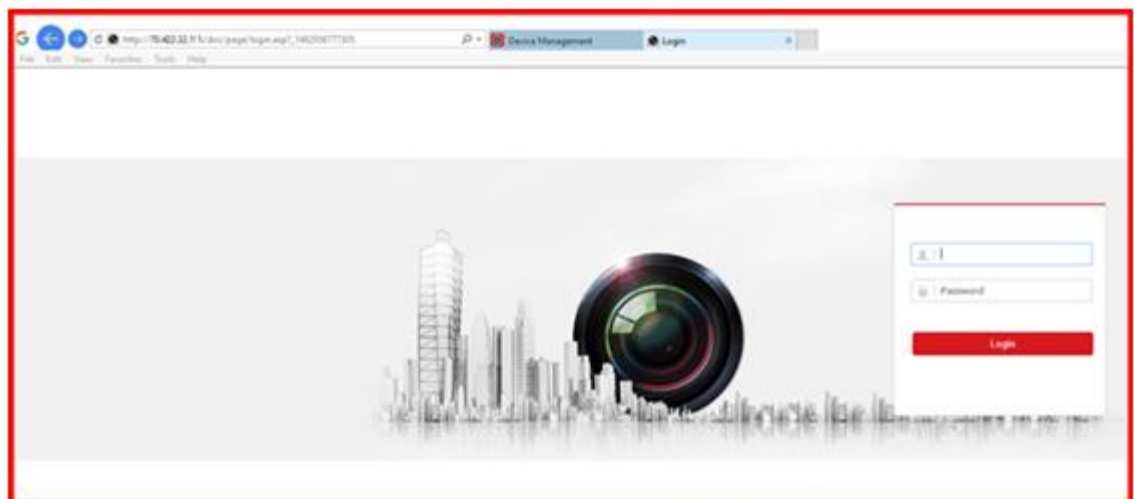

The screenshot shows a login screen with a city skyline and a large camera lens in the background. On the right, there is a login form with two input fields: 'User Name' (containing 'admin') and 'Password'. Below the fields is a red 'Login' button. The browser's address bar shows the URL 'http://70.422.32.191:81/device/login.asp?_146206777305'.