

HYBRID VIDEO RECORDER

KTVI4, KTVI8 & KTVI16


You Talk, We Listen®
USA
ONIX



Features

- Hybrid Recorder – TVI, IP & Analog
- KTVI4** – 4ch (2ch IP)
- KTVI8** – 8ch (2ch IP)
- KTVI16** – 16ch (2ch IP)
- Real Time Recording 30fps/ch
- 1,500ft Transmission over Coax
- H.264 Compression
- Dual Stream for Online Viewing
- Free Smart Phone Apps - iPhone & Android Markets
- HDMI & VGA Outputs
- 4/8/16ch of Audio
- Up to 32 Terabytes of Storage

Real Panel

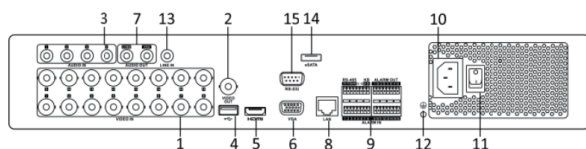

- Video In
- Audio Out (RCA)
- Audio In
- USB Port
- HDMI
- VGA
- Audio Out (CVBS)
- LAN1 and LAN2
- RS-485, Alarm In and Out
- 100~240V AC Power Input
- Power Switch
- Ground
- Line In
- eSATA
- RS-232 Serial Port

Part Number	KTVI4	KTVI8	KTVI16
TVI & Analog Ch.	4ch	8ch	16ch
Video Input	BNC Interface (1.0Vp-p, 75Ω)		
Resolution	Main: 1080p / 720p / VGA / 4CIF / CIF, Sub: WD1 / 4CIF / CIF / QCIF		
Frame Rate	30fps/ch @ 1080p / 30fps/ch @ 720p		
Video Bitrate	32 Kbps - 10Mbps		
Compression	H.264		
Supported Camera	720p/25fps, 720p/30fps, 720p/50fps, 720p/60fps, 1080p/25fps, 1080p/30fps		
Output	HDMI & VGA - 1920x1080, 1280x1024, 1280x720, 1024x768 / 60Hz		
Audio Compress.	G.711u		
Audio Input	4ch RCA	8ch RCA	16ch RCA
Audio Output	2ch (RCA, Linear 1KΩ for VGA and CVBS output)		
Audio Bitrate	64Kbps		
Alarm	16 in / 4 out		
CVBS	1ch BNC (2.0Vp-p, 1KΩ)		
Network Protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS		
SATA Ports	8 SATA		
eSATA	1 eSATA Interface		
Network Interface	1M / 10M / 100M / 1000M self-adaptive Ethernet interface		
Serial Interface	RS-485		
USB Ports	3 x USB2.0		
Operating Temp.	14 °F ~ 131 °F, 10% ~ 90%		
Chassis	19" x 18.5" x 3.5"		
Weight	17.6 lbs		