

HYBRID VIDEO RECORDER

TVIMR32


You Talk, We Listen[®]
ONIX USA



Features

- Hybrid Recorder – TVI, IP & Analog
TVIMR32 – 32ch (+ 8ch IP)
- Real Time Recording at 720p
- 12fps/ch at 1080p
- 1500ft Transmission over Coax
- H.264 Compression
- Dual Stream for Online Viewing
- Free Smart Phone Apps - iPhone & Android Markets
- HDMI & VGA Outputs
- 4ch of Audio
- Up to 16 Terabytes of Storage
- Rack Mountable, 1.5U Chassis

Real Panel

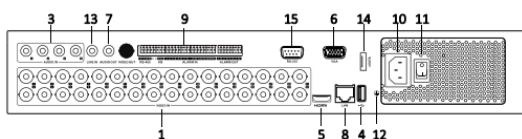

1. Video In
2. Unavailable
3. Audio In (RCA)
4. USB Port
5. HDMI
6. VGA
7. Audio Out
8. LAN Network
9. RS-485, Serial Keyboard, Alarm In
10. Power Input
11. Power Switch
12. Ground
13. Line In
14. eSATA
15. RS-232

Part Number	TVIMR32
TVI & Analog Ch.	32ch of HD-TVI or Standard Analog (CVBS)
Video Input	32 BNC Interface (1.0Vp-p, 75Ω)
IP Cameras	Additional 8ch IP Cameras (up to 2MP)
Resolution	Main: 1080p / 720p / VGA / 4CIF / CIF, Sub:WD1 / 4CIF / CIF / QCIF
Frame Rate	12fps per/ch @ 1080p / 30fps per/ch @ 720p
Video Bitrate	32 Kbps - 10Mbps
Compression	H.264
Supported Camera	720p/25fps, 720p/30fps, 720p/50fps, 720p/60fps, 1080p/25fps, 1080p/30fps
Output	HDMI & VGA - 1920x1080, 1280x1024, 1280x720, 1024x768 / 60Hz
Audio Compress.	G.711u
Audio Input	4ch RCA (2.0Vp-p, 1KΩ)
Audio Output	2ch (Line in and Line Out)
Audio Bitrate	64Kbps
Network Protocols	TCP/IP, PPPoE, DHCP, DNS, DDNS, NTP, SADP, SMTP, SNMP, NFS, iSCSI, UPnP™, HTTPS
SATA Ports	4 Slots - Up to 4TB per Slot
eSATA	1 eSATA Interface
Network Interface	1M / 10M / 100M / 1000M self-adaptive Ethernet interface
Serial Interface	RS-232, RS-485, Keyboard
USB Ports	3 x USB2.0
Alarm Ports	16 in / 4 out
Operating Temp.	14 °F ~ 131 °F, 10% ~ 90%
Chassis	19" Rack Mount, 1.5U Chassis, 19" x 15.3" x 2.7"
Weight	11 lbs (without hard drive)